

Stainless-steel spring mounts

FDA-316

Product description

Designed for vibration isolation of machines with speeds of more than 450 rpm.

Can handle loads of 12–125 kg.


Components

- 1 Stainless-steel spring  
FDA 25-75 in AISI 316L, 850t salt fog  
FDA 100-125 in AISI 302, 650t salt fog
- 2 Top and bottom casing AISI 316L
- 3 Bottom screw AISI 316L
- 4 Base plate AISI 316L
- 5 EVA rubber, adhered


Application

Particularly suited for outdoor electrical installations or installation in aggressive environments, generators, compressors, fans, pumps, refrigeration equipment, etc.


Type	Maximum load [kg]	Deflection [mm]
FDA025-316	25	24
FDA025-316B1	25	24
FDA025-316B2	25	24
FDA050-316	50	24
FDA050-316B1	50	24
FDA050-316B2	50	24
FDA075-316	75	24
FDA075-316B1	75	24
FDA075-316B2	75	24
FDA100-316	100	24
FDA100-316B1	100	24
FDA100-316B2	100	24
FDA125-316	125	24
FDA125-316B1	125	24
FDA125-316B2	125	24

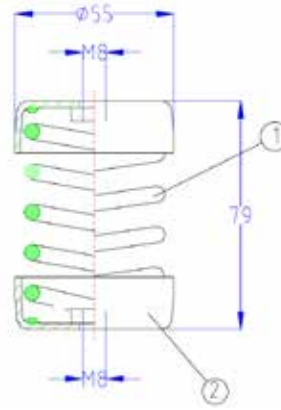

TYPE FDA-316

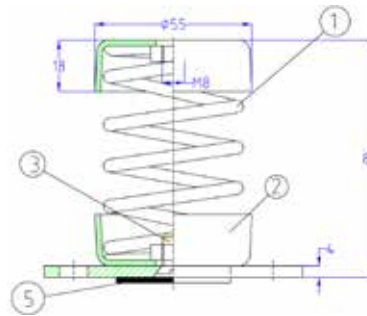

TYPE FDA-316B1

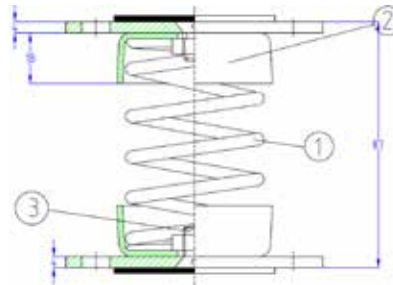

TYPE FDA-316B2

