

**Product description**

CHH1 is, among other things, designed for acoustic ceilings which are to be elastically suspended and for the vibration isolation of pipes and machines at speeds or frequencies of more than 300 rpm. Loads from 40–446 kg.

**Components**



The ceiling bracket consists of a spring inserted into a bent steel bracket. The spring rests in a rubber cup which eliminates the transfer of high frequencies. All metal surfaces are galvanised.

**Flexible properties**

The vertical natural frequency of CHSR is down to 3.50 Hz.

**Application**

When mounting, the rubber cup and spring are removed so that the bent steel brackets can be mounted on the ceiling.

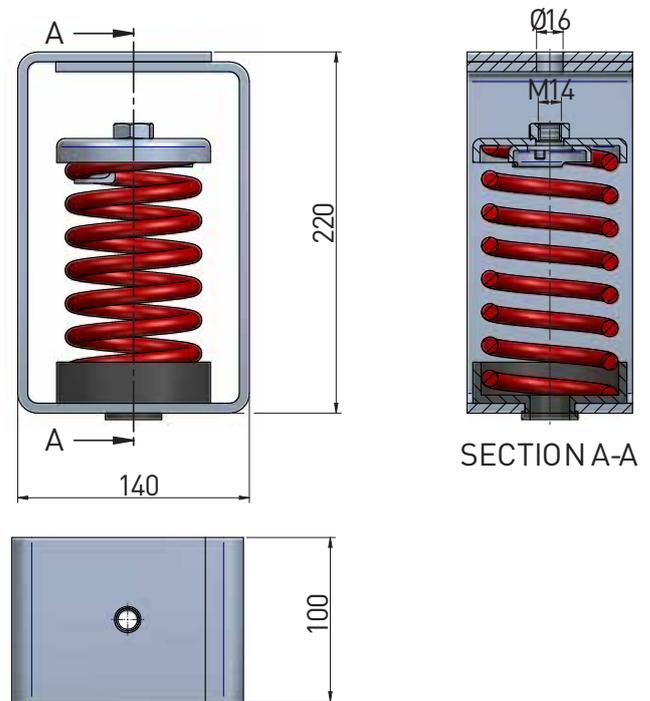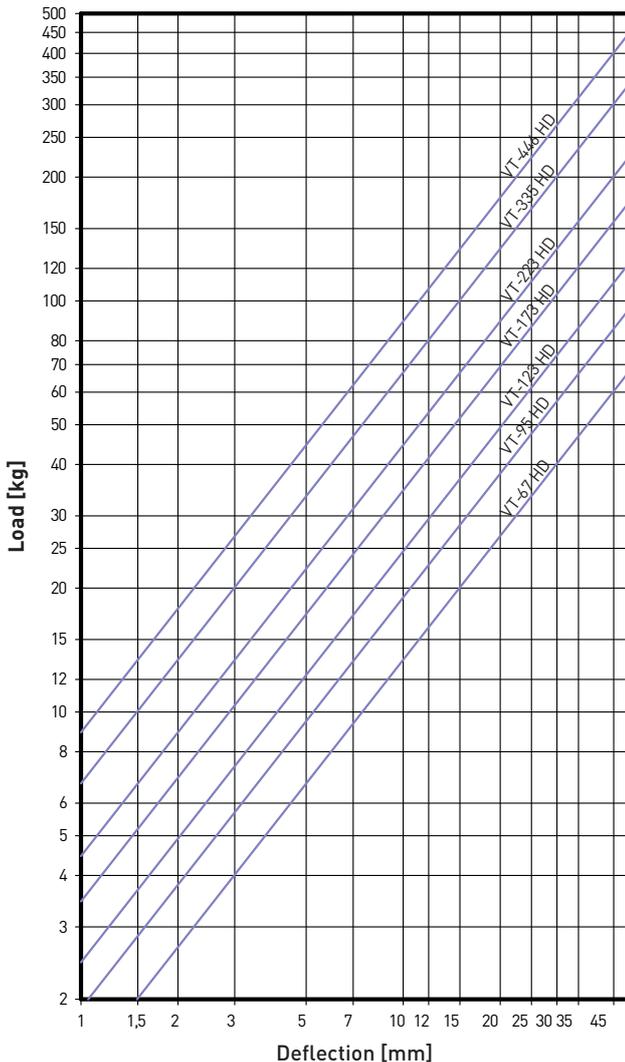

Type	Max. load [kg]	Deflection [mm]	Spring colour
CHH1-067	67	50	Blue
CHH1-095	95	50	White
CHH1-123	123	50	Black
CHH1-173	173	50	Beige
CHH1-223	223	50	Red
CHH1-335	335	50	Grey
CHH1-446	446	50	Green