

Product description

NFR/NF machine foot is used where light or heavy machinery is not going to be attached to the floor or ground. The machine foot's height adjustment can be used to adjust the machine to the required level.

NFR/NF comes with a tilt system adapted for uneven surfaces. The used elastomer is a mixture of oil-resistant nitrile rubber (NBR).


The height is adjusted by means of a screw and it can also be adjusted when the machine is set up on the machine foot. The large surface between the face of the machine and the machine foot provides good overall stability.

Application

NFR/NF is used mainly for punch presses, milling machines, machine-scissors, lathes, grinding machines, woodworking machines, blowers, fans, compressors, converters, etc.



Type NF	Static load [kg]	A [mm]	B min. [mm]	B max. [mm]	C	H max. [mm]	Deflection [mm]
NF-65	320	65	27	34	M12	105	2
NF-85	650	85	33	46	M16	114	2
NF-100	980	100	35	48	M16	120	2
NF-130	2500	130	45	58	M20	130	3
NF-160	4000	160	53	66	M20	130	3
NF-200	5000	200	55	68	M24	158	3
NF-250	7000	250	67	85	M30	153	3

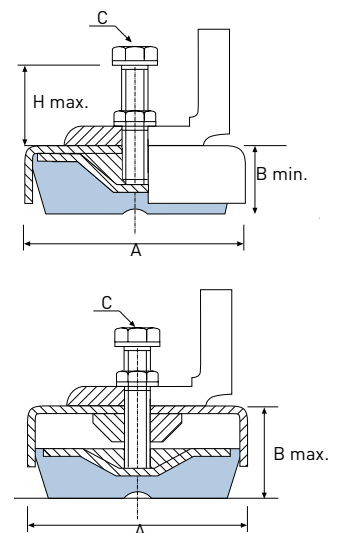

Type NFR	A [mm]	B [mm]	H min. [mm]	C	Static load [kg]	Deflection [mm]
NFR-85	85	33	100	M16	650	2
NFR-100	100	35	100	M16	980	2
NFR-130	130	45	130	M20	2500	3
NFR-160	160	53	130	M20	4000	3
NFR-200	200	55	140	M24	5000	3

