


WIRE ROPE ISOLATOR

DEFINITION
series HH4

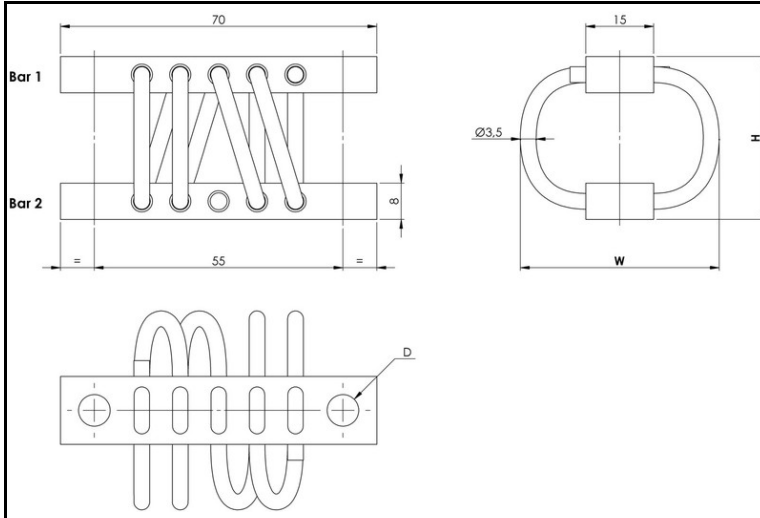

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : - 180°C to 300°C (-290°F to 570°F)
- Great adaptability/versatility

Specials on request

(material size and number of loops, etc.)

Dimensions are in millimeters. For reference only

| SERIES |
|---|
| Materials and finishes (meets RoHS requirements) |
| HH4 |
| Cable: stainless steel |
| Retainer bars: aluminium alloy/ SurTec |
| Other materials on request |

| MODEL | height H (mm) | width W (mm) | weight (kg) |
|-------|------------------|-----------------|----------------|
| -304 | 28 | 37 | 0,05 |
| -404 | 30 | 39 | 0,05 |
| -504 | 33 | 42 | 0,06 |
| -604 | 36 | 44 | 0,06 |
| -704 | 38 | 47 | 0,06 |
| -804 | 41 | 49 | 0,06 |
| -904 | 44 | 52 | 0,06 |
| -1004 | 51 | 61 | 0,07 |
| -1104 | 53 | 63 | 0,07 |
| -1204 | 54 | 71 | 0,07 |
| -1304 | 57 | 80 | 0,07 |

| INTERFACES | | | |
|--|-------------------------|---|--------------|
| fixtures holes D | Bar 1 | | |
| | 2 through holes ø7mm | 2 through holes ø7mm countersunk 90° | 2 x M6 |
| Bar 2 | | | |
| 2 through holes ø7mm | TM2 | not standard | not standard |
| 2 through holes ø7mm countersunk 90° | TCM | CM2 | not standard |
| 2 x M6 | TIM | CIM | IM2 |




HH4 - 304 CIM

SERIE: HH4
'Half-Helical' mount
from the HH4 series

MODEL: -304
height: 28mm
width: 37mm
weight: 0,05kg
loops: serie standard is 04
loops

INTERFACE: CIM
2 through holes ø7mm
countersunk 90° in bar 1,
2 x M6 in bar 2



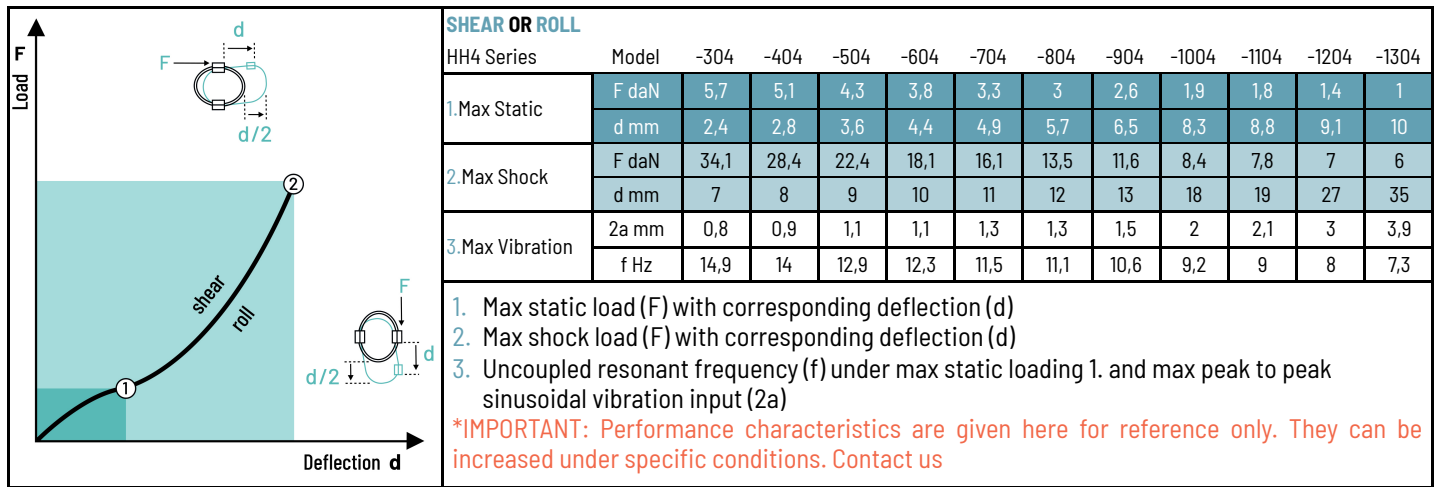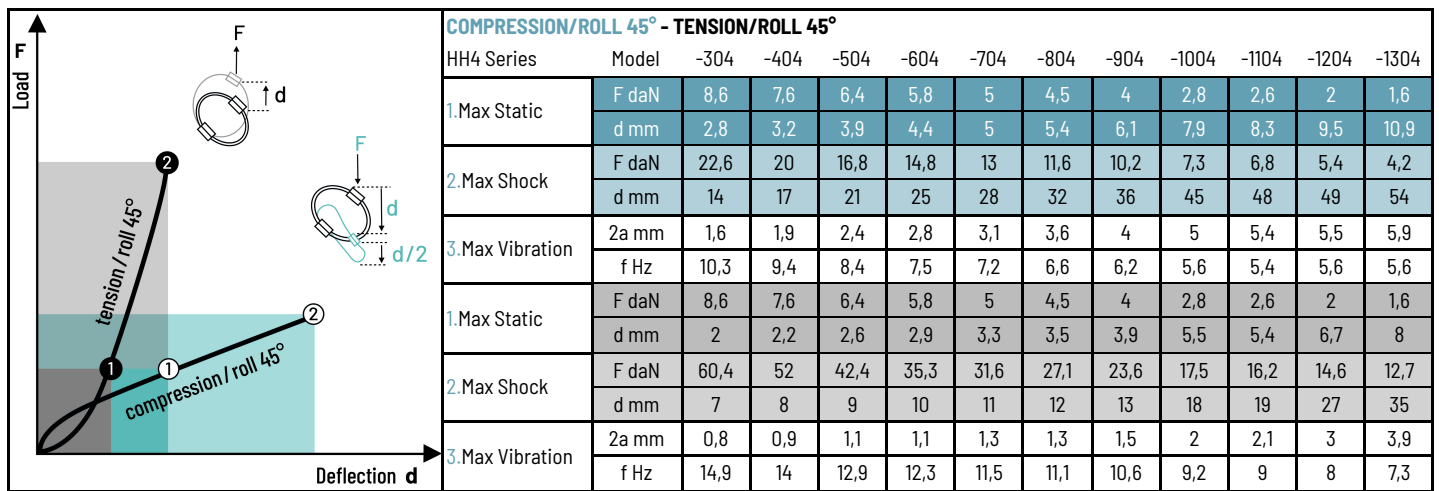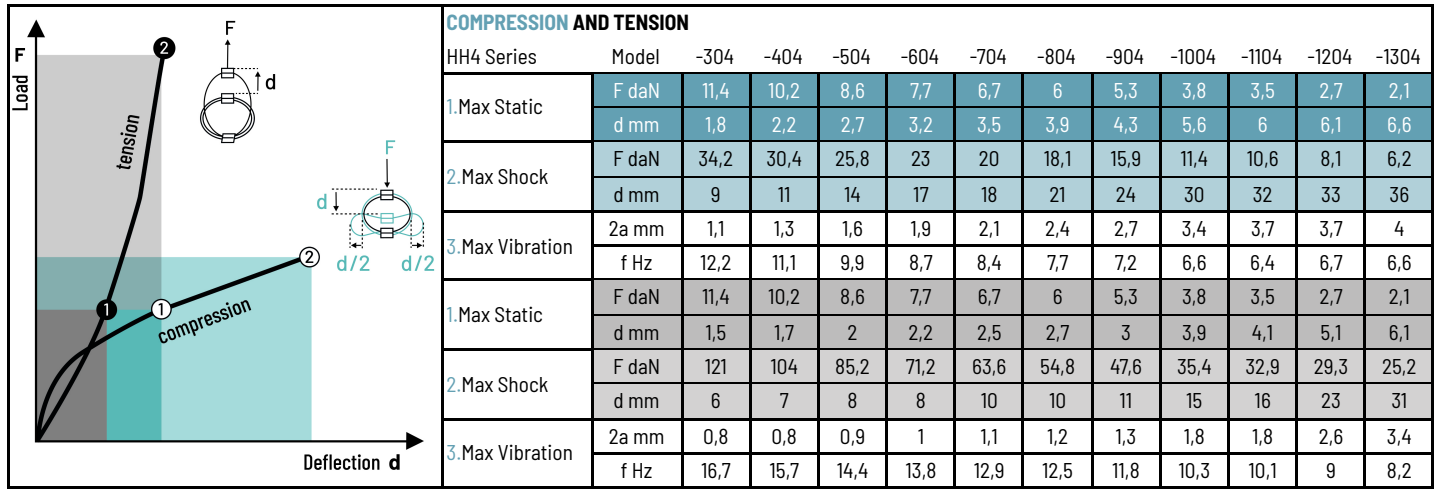

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

- Air** AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
- Ground Forces** GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
- Marine** GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
- Others** GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C